

525,183

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/016976 A1

- (51) International Patent Classification⁷: **F16L 9/12**, B29C 47/06
- (21) International Application Number: PCT/GB2003/003617
- (22) International Filing Date: 19 August 2003 (19.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0219273.0 19 August 2002 (19.08.2002) GB
- (71) Applicant (for all designated States except US): **UPONOR INNOVATION AB** [SE/SE]; Industivägen, S-513 81 Fristad (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BOWMAN, Jeremy** [GB/GB]; 171 Somersall Lane, Chesterfield S40 3NA (GB).
- (74) Agents: **HALL, Robert, Leonard et al.**; Harrison Goddard Foote, Fountain Precinct, Balm Green, Sheffield S1 2JA (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **PLASTICS PIPE**

(57) **Abstract:** A plastics pipe which comprises an inner core and an outer removable skin layer bonded thereto, the outer removable skin layer comprising at least two layers of compatible polymeric materials, a first outer protective layer chosen for its physical and mechanical properties, and a second inner bonding layer which adheres to the inner core, the adhesion of the bonding layer to the inner core being sufficient to prevent substantial undesired relative movement between the skin layer and the core during installation, but insufficient to prevent the outer skin layer from being cleanly removed by peeling, at least at the ends of the pipe, and insufficient to cause a substantial reduction in the impact strength of the inner core.



WO 2004/016976 A1

PLASTICS PIPE

This invention relates to plastics pipes and more particularly to a novel composite plastics pipe, a method for its manufacture, and a method for making joints in such a pipe.

In the handling, installation and connection of plastics pipes, the pipe surface is easily damaged. In "no-dig" plastics pipe installation techniques, for example, a tunnel is bored in the ground for the pipe and the pipe is then pushed or pulled through the tunnel into an excavated hole where the next pipe joint is to be made. Installation techniques such as pipe-bursting and slip lining can also place extreme stress on the pipe surface.

Other modern pipe laying methods can also subject the pipe to substantial bending and tensile forces, both of which can result in a deterioration of the mechanical strength of the pipe. In addition, the useful life of the pipe may be reduced by diffusible materials in the ground, or by environment conditions, for example, exposure to direct sunlight for long periods.

Of greatest concern, is that modern pipe laying methods can result in the pipe becoming scratched and dirty. This is disadvantageous firstly as the pipe material may be notch sensitive, in which case any scratches may cause greater damage to occur in the pipe during subsequent handling or use. Secondly, dirt and/or oxidation on the pipe surface may prevent successful welding. The main reason for failure of joints using an electrofusion fitting is that the surface of the pipe is dirty or has become oxidised. For this reason, until

recently, the pipe ends always have had to be cleaned and scraped before jointing, for example, with a hand or mechanical scraper. In practice, the cleaning and scraping is often uneven (the underside of the pipe in particular may be treated less carefully), and the quality of the end result depends upon the professional skill of the installer.

In recent years there have been proposals to provide the pipe with a non-adherent skin layer which can be removed in order to permit jointing. Pipe constructions of this type are described, for example, in JP3-24392, EP0474583, EP0604907, GB2323556, GB2300456, and WO93/00212. The entire disclosures of all these patents are incorporated herein by reference for all purposes.

All of these prior art pipe constructions suffer from the disadvantage that modern pipe laying techniques tend to cause wrinkling, rucking, or at least undesired relative movement of the non-adherent skin layer relative to the core when the pipe is pushed through the ground. These proposals have therefore not proved commercially acceptable.

- i More traditional proposals, wherein a protective skin layer is provided which is strongly adherent to the pipe, do not, of course, overcome the problem of dirt and oxidation on the outer surface, since such skin layers are very difficult to remove without elaborate equipment.
-) The presence of a tightly adherent skin layer can also dramatically lower the impact strength of the plastics pipe.

The first appreciation that the above problems could
5 be solved by using a protective skin layer which is only

lightly adherent to the core pipe occurs in GB2297137 and GB2297138, the entire disclosures of which are incorporated herein by reference for all purposes.

In GB2297138, for example, there is provided a plastic pipe which comprises an inner core and an outer protective layer bonded thereto, in which the dimensions of the pipe and the protective layer are such that the ratio of the external diameter of the pipe to the thickness of the protective layer is at least 70, preferably at least 100, and the cohesive strength of the outer protective layer, excluding any lines of weakness, at least at the ends of the pipe, is greater than the strength of the adhesive bond between the outer protective layer and the inner core. According to this specification, by a correct choice of the material of the skin layer and the extrusion conditions, it is possible to provide a level of adhesion which still permits clean removal of the skin layer by peeling, whilst preventing rucking or wrinkling of the skin layer during installation and without substantially adversely affecting the mechanical properties of the pipe.

GB2297137 and GB2297138 do not recommend the use of an adhesive between the skin layer and the core, relying instead on the Van der Waals and/or diffusive bonding between the polymer surfaces.

The composite pipe of UK patents GB2297137 and GB2297138 has been commercially extremely successful, but it has been found that under specific conditions of temperature and loading it is difficult to provide a skin layer which has both the required toughness and limited adhesion to the core pipe. Quality control of the base polymer material of the skin layer, and control of the

extrusion conditions during manufacture, need to be rigorously maintained if undesirable quantities of scrap are to be avoided. This substantially increases both raw material and manufacturing costs.

A novel composite plastics pipe has now been developed which has the advantages of a plastics pipe with a removable outer protective layer, but which gives improved flexibility in choice of materials and manufacturing conditions without substantially adversely affecting the mechanical properties of the pipe.

In a first aspect, the invention provides a plastics pipe which comprises an inner core and an outer removable skin layer bonded thereto,

the outer removable skin layer comprising at least two layers of compatible polymeric materials, a first outer protective layer chosen for its physical and mechanical properties, and a second inner bonding layer which adheres to the inner core,

the adhesion of the bonding layer to the inner core being sufficient to prevent substantial undesired relative movement between the skin layer and the core during installation, but insufficient to prevent the outer skin layer from being cleanly removed by peeling, at least at the ends of the pipe, and insufficient to cause a substantial reduction in the impact strength of the inner core.

In a second aspect the invention provides a method for the production of a plastics pipe comprising an inner core and an outer removable skin layer bonded thereto, the outer removable skin layer comprising at least two layers of compatible polymeric materials, a first outer protective layer chosen for its physical and mechanical

properties, and a second inner bonding layer which adheres to the inner core, which method comprises co-extruding molten polymeric materials forming the inner core and the outer removable skin layer from one or more extruder dies, bringing the molten polymeric materials together and allowing them to cool, such that, on cooling, the adhesion of the bonding layer to the inner core is sufficient to prevent substantial undesired relative movement between the skin layer and the core during installation of the pipe, but insufficient to prevent the outer skin layer from being cleanly removed by peeling, at least at the ends of the pipe, and insufficient to cause a substantial reduction in the impact strength of the inner core.

In a further aspect, the invention provides a method of making a joint to a plastics pipe according to the first aspect of the invention, or of joining two such plastics pipes, which comprises peeling the skin layer from the region or regions of the pipe to be joined, to expose a clean surface suitable for electrofusion jointing, installing an electrofusion fitting over the clean surface or surfaces of the pipe or pipes and activating the electrofusion fitting to fuse the region or regions of the pipe or pipes thereto.

By "compatible polymeric materials" in the specification is meant polymeric materials that are capable of fusing or adhering tightly together under heat and pressure, for example, when co-extruded. Such polymeric materials are generally of similar chemical composition, though this is not necessarily essential.

By "undesired relative movement" in this specification is meant movement or de-bonding of the skin layer relative

to the core during directional drilling, pipe bursting, slip lining or other conventional pipe installation procedures.

By separating the functions of providing physical and mechanical strength on the one hand, and bonding on the other, we have found that it is possible to improve greatly the consistency of the resultant pipe without sacrificing quality and performance. Thus the properties of the materials of the skin layer no longer have to be a compromise between conflicting requirements.

Preferably the adhesion of the first outer protective layer to the second inner bonding layer of the skin layer is at least twice, and preferably, at least 5 times, more preferably 10 times, the strength of the adhesion between the bonding layer and the inner core.

The strength of the adhesive bond between the bonding layer and the inner core is preferably at least 0.1 N/mm, more preferably at least 0.2 N/mm, when measured by a rolling drum peel test as described in Appendix 1. The adhesive bond between the bonding layer of the skin and the inner core is preferably less than 2.0 N/mm, more preferably less than 1.5 N/mm. Very good results have been achieved using an adhesion between the bonding layer of the skin and the inner core within the range of from 0.3 to 1.5 N/mm, when measured by the above-mentioned rolling drum peel test.

It is likely that any adhesion between the skin bonding layer and the inner core will have some effect upon the impact strength of the plastics pipe, and it is presumably for this reason that prior art proposals (other than GB2297137 and GB2297138) have always sought

to avoid adhesion between the skin layer and the core. Nevertheless, it has been found that the combination of the tough outer protective layer and the light bonding used in the present invention can still produce a plastics pipe having sufficient impact strength to meet the requirements of all available standards and moreover improved impact strength over the products of GB2297137 and GB2297138. Preferably the strength of the adhesive bond between the skin layer and the inner core is such that the impact strength of the composite pipe is at least 50%, preferably at least 75%, more preferably at least 90% of the impact strength of the inner core without the skin layer.

Each of the layers of the composite plastics pipe of the present invention can comprise any suitable thermoplastic polymeric material, consistent with the maintenance of the required properties. Suitable polymeric materials include, for example, olefinically-unsaturated polymers and co-polymers, for example, polyolefins such as polyethylene, polypropylene, polybutene and polybutylene; ethylene and propylene co-polymers, for example, ethylene-vinyl acetate polymers, and propylene-vinyl acetate polymers; halogenated-vinyl polymers such as vinyl chloride polymers and co-polymers; polyamides, for example, nylon 6, nylon 11 and nylon 66; polycarbonates; ABS polymers and ionomer polymers such as Surlyn (RTM).

The inner core of the pipe comprises a polymeric material chosen to be compatible with the particular application, and in particular with the fluid material to be conveyed by the pipe. For many applications polyethylene is the preferred material for the inner core. The grade of polyethylene chosen, that is to say,

high density, medium density, low density, or linear low density, will depend upon the particular application. Suitable grades of polyethylene for pressure pipe applications preferably meet the requirements of at least one of prEN 12201-1 (except clause 4.2.1 and the associated pigment or carbon black requirements if the PE material is unpigmented), prEN12201-2 (except clause 5.2 and the associated pigment or carbon black requirements if the PE material is unpigmented), prEN1555-1 (except clause 4.2.2 and the associated pigment or carbon black requirements if the PE material is unpigmented) and prEN1555-2 (except clause 5.2 and the associated pigment or carbon black requirements if the PE material is unpigmented).

Any suitable equivalent grade of polyethylene may, of course, also be used.

The removable skin layer comprises at least two layers of compatible polymeric materials, which can be any of those previously enumerated provided that they meet the definition of "compatible" previously set out in the specification. The first outer protective layer is preferably formed from a polymeric material or a blend of polymeric materials having good mechanical and physical properties, especially toughness and low temperature impact strength, together with an ability to receive quantities of stabilising materials, in particular UV stabilisers, sufficient to protect the underlying layer(s) and the inner core. Preferably the outer protective layer has a notched Charpy impact strength of at least 1 kJ/m², more preferably at least 2 kJ/m² and most preferably at least 4 kJ/m², when measured using the method of ISO 179/16A at a temperature of -20°C.

Preferred polymeric materials for the outer protective layer comprise propylene homo- and co-polymers, propylene block co-polymers, and propylene random co-polymers.

An advantage of the plastics pipes of the present invention is that the normal UV stabiliser and colorant package need not be included in the plastics material of the inner core, provided that sufficient quantities of these materials are included in the outer protective layer. This enables the inner core to comprise a natural polymeric material, free or substantially free from additives which add to the cost of the core material and which, in certain circumstances, may impair the mechanical or physical properties of the core material. Alternatively, stabilisers can be included in the core material, but the outer protective skin layer can be coloured to indicate the fluid being transported within the pipe.

Suitable stabiliser or ultra-violet blocking additives include, for example, titanium dioxide, carbon black, and other fillers. Whilst carbon black is an excellent UV stabiliser and reinforcing filler, buried pipes are frequently colour coded and its use in the outer protective layer is therefore not possible for many applications. Titanium dioxide is, therefore, the preferred filler and UV stabiliser since this is also compatible with many colorant packages. Other filler materials such as chalk and talc, may also be used. The preferred filler particle size is dependent on the filler being used, but for titanium dioxide, for example, the average particle size range is preferable from 0.003 to 0.025 microns.

The second, inner bonding layer is required to be compatible with the first, outer protective layer and to have a consistent light adhesion to the underlying core pipe such that the total skin layer can be peeled to leave a clean surface. Preferably, although not essentially, the inner bonding layer has a similar chemical composition and molecular weight to that of the outer protective layer and, for example, it can be a different grade of the same polymer. Thus where the outer protective layer comprises a propylene homo- or co-polymer, the inner bonding layer can also be a propylene homo- or co-polymer, or a propylene random co-polymer such that the adhesion to the inner core is below 2.0N/mm and preferably below 1.0N/mm.

Without wishing to be bound to any particular theory, it is believed that the adhesion between the high molecular weight polymers of the inner bonding layer and the core is as a result of Van der Waals and/or diffusive bonding, or similar forces. The adhesive properties of the inner bonding layer could be modified, for example, by the addition of an adhesion modifying agent such as a glycerol ester, as described in co-pending UK patent application no. (Agent's reference P071963GB) .

A particularly preferred plastics pipe according to the present invention comprises an inner core of polyethylene and a skin comprising an outer layer of a propylene block co-polymer and an inner layer of a propylene random co-polymer.

Preferably the impact strength of a 90 mm outside diameter plastics pipe having a polyethylene inner core and a polypropylene skin layer with an SDR of 17.0 is greater than 300 joules when measured using the method of

EN1411:1996 at a temperature of -10°C using a 90mm diameter tup for impacting the pipe.

The skin layer can, of course, comprise more than two layers of polymeric material, although in practice this is not usually necessary.

The relative thickness of the outer layer and the dimensions of the pipe have also been found to affect the impact resistance of the pipe. This is discussed in GB 2297138. Preferably the total skin layer has a thickness of greater than 0.1 mm, more preferably greater than 0.2 mm, and most preferably within the range of from about 0.3 mm to 2.0 mm.

Within the skin layer, the first, outer protective layer preferably has a thickness of from 0.2 mm to 1.8 mm, more preferably from 0.3 mm to 1.2 mm, most preferably from 0.4 mm to 1.0 mm. The second bonding layer preferably has a thickness of from 0.01 mm to 0.25 mm, more preferably from 0.025 mm to 0.2 mm, most preferably from 0.05 mm to 0.15 mm.

The dimensions of the pipe and the protective layer are preferably such that the ratio of the external diameter of the pipe to the thickness of the skin layer is at least 70, more preferably at least 100, most preferably in the range 150 to 800. From this it can be seen that it is possible to use a thicker protective layer on a pipe of greater diameter.

When stripping the skin layer from the pipe, it is important that no residue or holidays should be left on the pipe surface that could interfere with the

electrofusion jointing process. Thus conventional adhesives and skin layers that are prone to tearing or fragmentation should be avoided. In general the force required to rupture the skin layer should be greater than the force required to peel the skin layer from the inner core.

By "a clean surface" in this specification is meant a pipe surface that can be subjected to electrofusion jointing without further preparation or treatment. Such surfaces should be clean such that the electrofusion joint formed to them meets the requirements of one or more of pr EN12201 part 3, pr EN1555 part 3 and WIS 04-32-14.

The composite plastics pipe of the present invention is preferably produced by co-extrusion, wherein the polymeric materials are brought together in the pressure area of the die and exit as a single extrudate. For example, the die may be connected to one, two, three or more extruders and fed with separate streams of molten material. Alternatively, the die may be provided with concentric die outlets fed with separate streams of molten polymeric materials which are to form the inner core and the skin layer. In this case, the extrudates, on leaving the extruder die outlets, can be brought into contact with each other whilst still molten, preferably in a sizing die which simultaneously adjusts the outer diameter of the pipe.

In a further alternative, the inner core extrudate may be passed through a sizing die before applying the skin layer. In this case it may be necessary to re-heat or flame-brush the surface of the inner core extrudate to create a surface ready to receive the skin layer.

Because of the difficulty of maintaining a consistent adhesion between the inner core and the skin layer, and of keeping the core surface clean (prior to coating with the skin), this method is not presently preferred.

The invention is illustrated by the following Example:

EXAMPLE

A polyethylene core pipe of nominal outer diameter 90mm is co-extruded with a propylene random copolymer skin layer. The experiment is repeated replacing the propylene random copolymer with a dual layer skin comprising (I) a propylene block copolymer outer protective layer and (II) a propylene random copolymer inner bonding layer.

Skin adhesion is measured using a rolling drum peel test as described in Appendix 1.

The skin layers of the resultant pipes can be peeled readily using a simple hand tool, exposing a clean surface of the core pipe. Electrofusion jointing tests give very good results in conformance with prEN12201 part 3, prEN1555 part 3 and WIS 04-32-14. In a comparison test, the same polyethylene core pipe is extruded with a propylene block copolymer skin layer alone. The skin layer firmly adheres to the core pipe and cannot be removed from the pipe by peeling.

The impact strength of the pipes is measured at -10°C, with and without the skin layer, using the method of EN 1411:1996. In further experiments the pipes are notched

at 90° to the point of impact prior to testing to simulate service conditions. Whilst the presence of the skin layer tends to lower the impact strength of the pipe, all values are within the requirements of available standards.

APPENDIX 1DETERMINATION OF THE ADHESION STRENGTH OF PIPE SKIN -
CORE PEELApparatus

A tensile testing machine accurate to grade A of BS5214 : Part 1: 1975 or grade 1 of BS1610 : Part 1 : 1985, for example, a Lloyds tensile test machine, using a 100N load cell.

Test Specimens

Two test pieces are cut one from each end of the sample pipe, 25mm +/- 2mm wide, the two sample rings of pipe are trimmed around the circumference to remove the jagged edge. The pipe is marked along top dead centre (TDC) of the extrusion line (if known).

The two ring specimens are marked with an indelible marker at quarterly points around the circumference beginning at TDC (if known, as shown in figure 1.

Procedure



Cut through the skin along mark at TDC & prise edge of skin from pipe, peel skin off to 30 - 40mm length, feed peeled skin through the jig as shown & clamp in upper jaws.

Mount the test piece in the jig as shown in Figures 2 and 2a.

The skin is then peeled from the pipe at a separation rate of 100mm/min and a trace recorded of load versus time.

The average value of the load required to peel the skin sample is calculated (Newtons), and divided by the true width of the peel sample to obtain the test result (Newtons/millimetre).

The average of the 10 peak load values recorded is calculated (Newtons), and divided by the true width of the peel sample to obtain the test result

(Newtons/millimetre).

The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings), may be replaced by alternative features serving the same, equivalent, or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of any foregoing embodiments. The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

CLAIMS

1. A plastics pipe which comprises an inner core and an outer removable skin layer bonded thereto, the outer removable skin layer comprising at least two layers of compatible polymeric materials, a first outer protective layer chosen for its physical and mechanical properties, and a second inner bonding layer which adheres to the inner core, the adhesion of the bonding layer to the inner core being sufficient to prevent substantial undesired relative movement between the skin layer and the core during installation, but insufficient to prevent the outer skin layer from being cleanly removed by peeling, at least at the ends of the pipe, and insufficient to cause a substantial reduction in the impact strength of the inner core.
2. A plastics pipe according to claim 1, wherein the adhesion of the first outer protective layer to the second inner bonding layer of the skin layer is at least five times the strength of the adhesion between the bonding layer and the inner core.
3. A plastics pipe according to claim 1 or 2, wherein the adhesion between the second inner bonding layer and the inner core is from 0.3 to 1.5 N/mm when measured by a rolling drum peel test as described in Appendix 1.
4. A plastics pipe according to any one of the preceding claims, in which the strength of the adhesive bond between the skin layer and the inner core is such that the impact strength of the composite pipe is at least 75% of the impact



strength of the inner core without the skin layer.

5. A plastics pipe according to any one of the preceding claims, in which the inner core comprises polyethylene.
6. A plastics pipe according to any one of the preceding claims, wherein the outer protective layer comprises a propylene homo-or co-polymer, or a propylene block co-polymer.
7. A plastics pipe according to claim 7, wherein the outer protective layer comprises a propylene block co-polymer.
8. A plastics pipe according to any one of the preceding claims, wherein the second inner bonding layer comprises a propylene homo - or co-polymer, or a propylene random co-polymer.
9. A plastics pipe according to claim 8, wherein the inner bonding layer comprises a propylene random co-polymer.
10. A plastics pipe according to any one of the preceding claims, which comprises an inner core of polyethylene and a skin comprising an outer layer of a propylene block co-polymer and an inner layer of a propylene random co-polymer.
11. A plastics pipe according to any one of the preceding claims, in which the inner core comprises polyethylene and the skin layer comprises a propylene co-polymer and wherein the impact strength of the pipe is greater than 300 joules,

when measured using the method of EN1411:1996 at a temperature of -10°C using a 90mm tup for impacting the pipe.

12. A plastics pipe according to any one of the preceding claims, wherein the skin layer has a thickness within the range of from 0.3 mm to 2.0 mm.
13. A plastics pipe according to any one of the preceding claims wherein the first outer protective layer has a thickness of from 0.3 mm to 1.8 mm.
14. A plastics pipe according to any one of the preceding claims, in which the second inner bonding layer has a thickness of from 0.025 mm to 0.2 mm.
15. A plastics pipe according to any one of the preceding claims, wherein the ratio of the external diameter of the pipe to the thickness of the skin layer is from 150 to 800.
16. A plastics pipe substantially as hereinbefore described.
17. A method for the production of a plastics pipe comprising an inner core and an outer removable skin layer bonded thereto, the outer removable skin layer comprising at least two layers of compatible polymeric materials, a first outer protective layer chosen for its physical and mechanical properties, and a second inner bonding layer which adheres to the inner core, which method comprises co-extruding molten polymeric materials forming the inner core




and the outer removable skin layer from one or more extruder dies, bringing the molten polymeric materials together and allowing them to cool, such that, on cooling, the adhesion of the bonding layer to the inner core is sufficient to prevent substantial undesired relative movement between the skin layer and the core during installation of the pipe, but insufficient to prevent the outer skin layer from being cleanly removed by peeling, at least at the ends of the pipe, and insufficient to cause a substantial reduction in the impact strength of the inner core.

18. A method according to claim 17, wherein the polymeric materials of the inner core and the outer removable skin layer are extruded simultaneously and brought together whilst still hot.
19. A method for the manufacture of a plastics pipe substantially as hereinbefore described.
20. A method of making a joint to a plastics pipe according to any one of claims 1 to 16, or of joining two such plastics pipes, which comprises peeling the skin layer from the region or regions of the pipe to be joined, to expose a clean surface suitable for electrofusion jointing, installing an electrofusion fitting over the clean surface or surfaces of the pipe or pipes and activating the electrofusion fitting to fuse the region or regions of the pipe or pipes thereto.

BEST AVAILABLE COPY

1/2

Figure 1

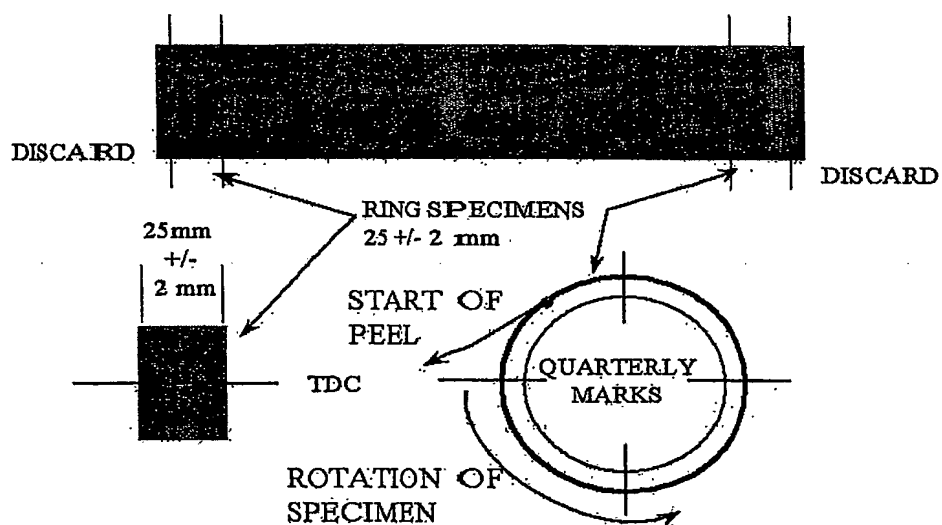

BEST AVAILABLE COPY

2/2

Figure 2


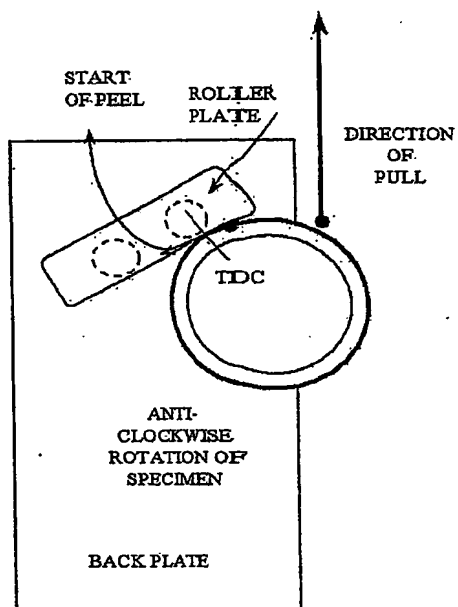


Figure 2a

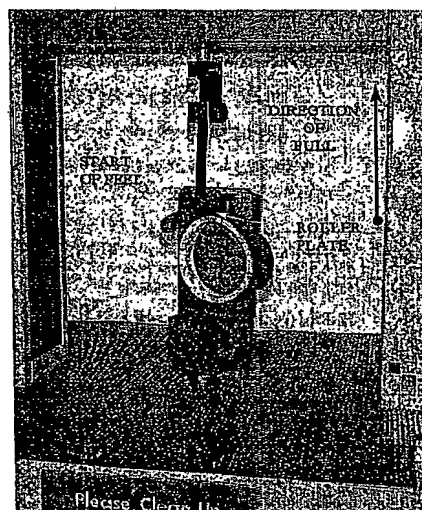

INTERNATIONAL SEARCH REPORT

Intern: Application No
PCT/GB 03/03617

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F16L9/12 B29C47/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F16L B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-------------------------------------|
| X | GB 2 297 137 A (UPONOR LTD) 24 July 1996 (1996-07-24) cited in the application page 13, line 15 -page 13, line 23; claims 1-22 | 1,3-7, 11-13, 15,17, 18,20 |
| X | GB 2 297 138 A (UPONOR LTD) 24 July 1996 (1996-07-24) cited in the application page 14, line 25 -page 15, line 5; claims 1-22 --- -/-- | 1,3-7, 11-13, 15,17, 18,20 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

5 November 2003

Date of mailing of the international search report

12/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Donnelly, C

INTERNATIONAL SEARCH REPORT

Int'l application No.
CT/GB 03/03617

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 16, 19
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 16,19

Claims 16 and 19 consist of a vague reference to the description and as such no meaningful search can be carried out.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

International Application No

PCT, no 03/03617

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|----------------------------|
| A | <p>WO 93 00212 A (UPONOR NV) 7 January 1993 (1993-01-07) cited in the application page 6, line 33 -page 7, line 8; claims 11-15; figure 3</p> <p>-----</p> | <p>1-15,17, 18,20</p> |

INTERNATIONAL SEARCH REPORT

ation on patent family members

Intern----- Application No

PCT/ 03/03617

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| GB 2297137 | A | 24-07-1996 | AT 244844 T | 15-07-2003 |
| | | | AU 705621 B2 | 27-05-1999 |
| | | | AU 4537896 A | 07-08-1996 |
| | | | CZ 9702268 A3 | 16-09-1998 |
| | | | DE 69629013 D1 | 14-08-2003 |
| | | | DE 804699 T1 | 25-10-2001 |
| | | | DK 804699 T3 | 27-10-2003 |
| | | | WO 9622485 A1 | 25-07-1996 |
| | | | EP 1321703 A2 | 25-06-2003 |
| | | | EP 0804699 A1 | 05-11-1997 |
| | | | FI 973028 A | 08-09-1997 |
| | | | GB 2297138 A , B | 24-07-1996 |
| | | | GB 2323556 A , B | 30-09-1998 |
| | | | HU 9702402 A2 | 30-03-1998 |
| | | | JP 10512656 T | 02-12-1998 |
| | | | NO 973309 A | 16-09-1997 |
| | | | PL 321369 A1 | 08-12-1997 |
| | | | RU 2165047 C2 | 10-04-2001 |
| | | | TR 9700661 T1 | 21-01-1998 |
| | | | US 6016849 A | 25-01-2000 |
| GB 2297138 | A | 24-07-1996 | GB 2297137 A | 24-07-1996 |
| | | | AT 244844 T | 15-07-2003 |
| | | | AU 705621 B2 | 27-05-1999 |
| | | | AU 4537896 A | 07-08-1996 |
| | | | CZ 9702268 A3 | 16-09-1998 |
| | | | DE 69629013 D1 | 14-08-2003 |
| | | | DE 804699 T1 | 25-10-2001 |
| | | | DK 804699 T3 | 27-10-2003 |
| | | | WO 9622485 A1 | 25-07-1996 |
| | | | EP 1321703 A2 | 25-06-2003 |
| | | | EP 0804699 A1 | 05-11-1997 |
| | | | FI 973028 A | 08-09-1997 |
| | | | GB 2323556 A , B | 30-09-1998 |
| | | | HU 9702402 A2 | 30-03-1998 |
| | | | JP 10512656 T | 02-12-1998 |
| | | | NO 973309 A | 16-09-1997 |
| | | | PL 321369 A1 | 08-12-1997 |
| | | | RU 2165047 C2 | 10-04-2001 |
| | | | TR 9700661 T1 | 21-01-1998 |
| | | | US 6016849 A | 25-01-2000 |
| WO 9300212 | A | 07-01-1993 | FI 99158 B | 30-06-1997 |
| | | | AU 2019292 A | 25-01-1993 |
| | | | DE 4291982 T0 | 13-01-1994 |
| | | | WO 9300212 A1 | 07-01-1993 |
| | | | GB 2263524 A , B | 28-07-1993 |